



LOG AND LUMBER HANDLING SYSTEMS

OFFBEARER



Offbearer with Splitter

FEATURES

The Mellott Belted Offbearer will move slabs, cants and lumber quickly and safely from the headsaw. Fully assembled and ready to install, this offbearer will fit any mill with 2 1/4" clearance from the highest point of the saw mandrel bearing to the height of the headblock.

The Mellott Belted Offbearer is equipped with a board tipping attachment and our new style splitter blade. The splitter blade is adjustable for use with saws from 48" diameter up to 60" diameter.

The offbearer is available in 18", 22" and 24" wide models, right and left hand.

The offbearer can be driven by downstream rollcases, a drive mounted to the offbearer or by the saw mandrel.

SPECIFICATIONS

Height	7 3/8"
Length	69"
Distance required from sawline	
18" Wide belt	24 1/2"
22" Wide belt	28 1/2"
24" Wide belt	30 1/2"
Belt	Pvc Cos 150
Belt Widths	18", 22" & 24"
Driveshaft	1 7/16"
Drive	2 Hp Electric, Mandrel Or By Rolls
Pulleys	5 1/2" Diameter
Conveying Speed	250 FPM

Item Number	Description
40C	2 HP Drive
40A	18" Wide
40B	22" Wide
40	24" Wide

MELLOTT MFG. CO., INC.


13156 Long Lane
Mercersburg, PA 17236
Phone: (717) 369-3125 Fax: (717) 369-2800
sales@mellottmfg.com

WWW.MELLOTTMFG.COM



LOG AND LUMBER HANDLING SYSTEMS

DIMENSIONS

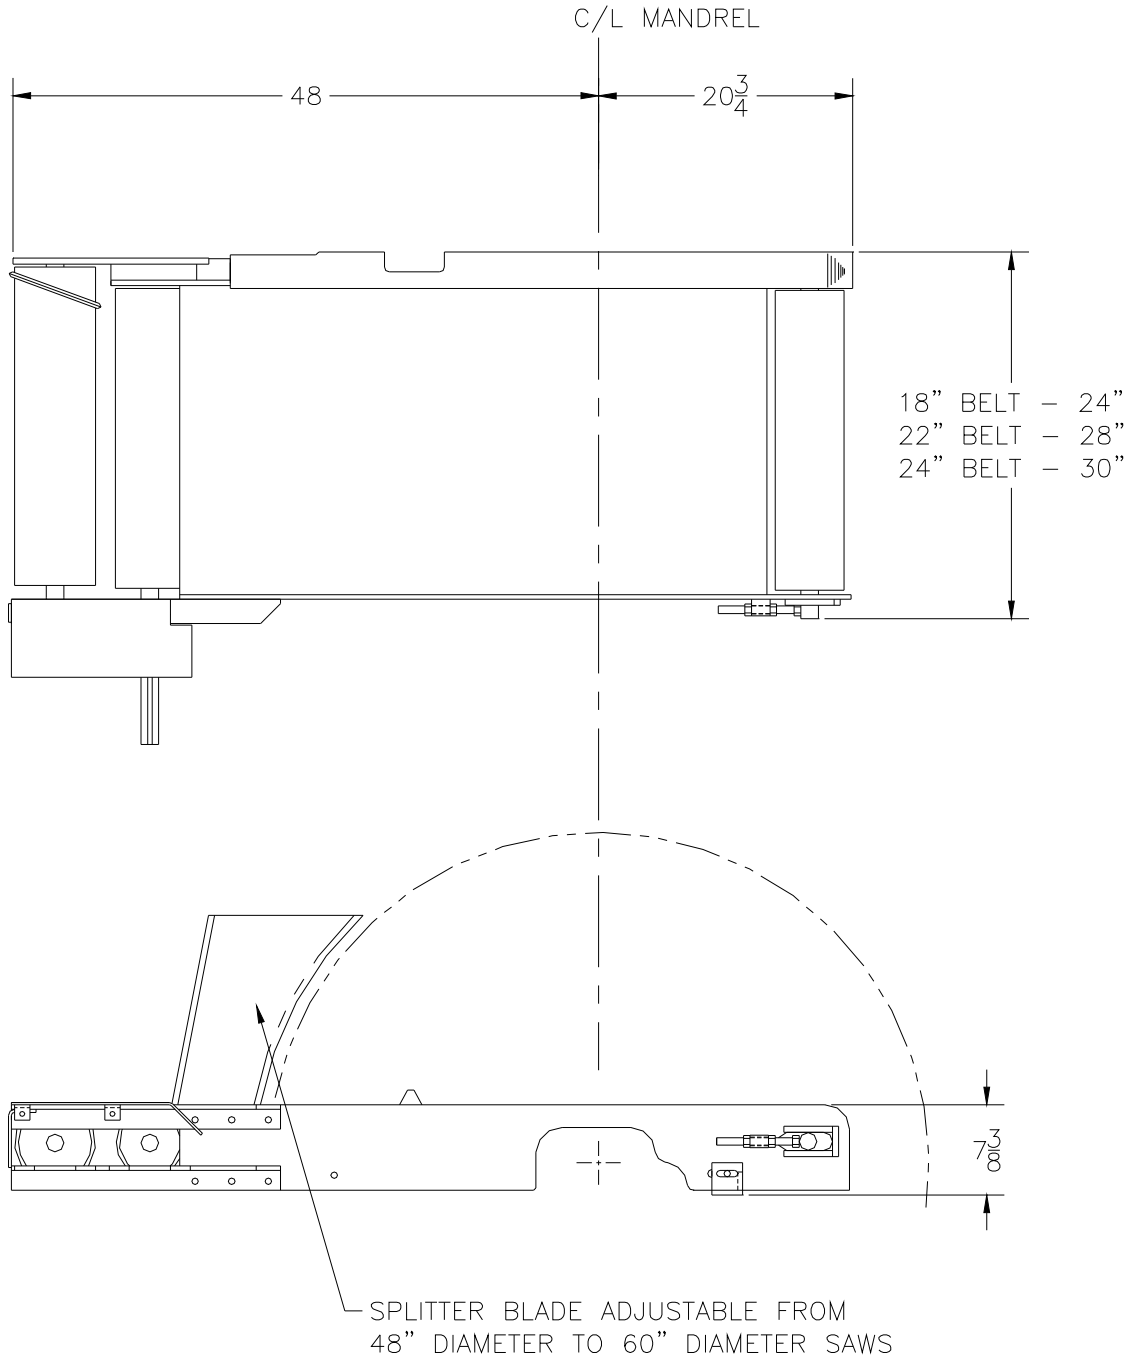

MELLOTT MFG. CO., INC.

13156 Long Lane
Mercersburg, PA 17236
Phone: (717) 369-3125 Fax: (717) 369-2800
sales@mellottmfg.com

WWW.MELLOTTMFG.COM