



Mellott

LOG AND LUMBER HANDLING SYSTEMS

ROLLCASES



FEATURES

The Mellott Rollcases are custom designed as required.


Live Lumber Rolls Specifications (plain or spiraled)
6-5/8" Diameter Rolls x 24" face on 24" centers
8-5/8" Diameter Rolls x 30" face on 30" centers
10-3/4" Diameter Rolls x 30" face on 30" centers

Shaft Diameters—1-7/16" , 1-15/16" or 2-7/16"
Bearings—Pillow Blocks and Piloted Flange
Roller Chain— RC60, RC80, RC100
Optional Belt Driven Rolls

Shields are hinged with latches for ease of access.

Drive options include Sumitomo foot mounted reducer with 3 hp, 5hp or 7-1/2 hp electric motor or a hydraulic motor using a chain drive .

Optional Resaw Infeed, Resaw Outfeed, Jump Chains, Jump Skid Transfers, Slab Kickoff, and Dual Purpose Kickoff Transfers are available with automatic or manual controls with air or hydraulic

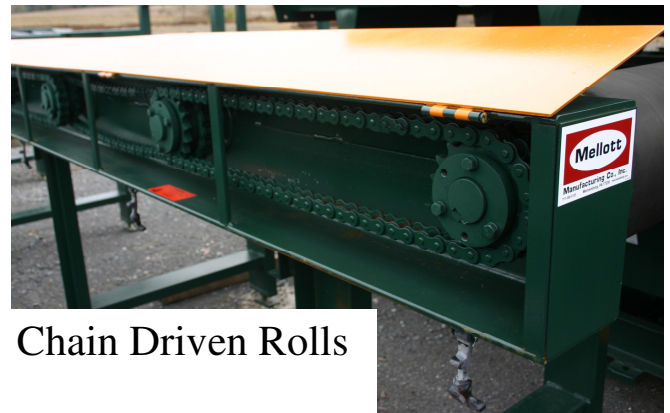

Chain Driven Rolls



Belt Driven Rolls

MELLOTT MFG. CO., INC.

13156 Long Lane
Mercersburg, PA 17236
Phone: (717) 369-3125 Fax: (717) 369-2800
sales@mellottmfg.com

www.mellottmfg.com