



LOG AND LUMBER HANDLING EQUIPMENT

OFFBEARER



Offbearer with Splitter

FEATURES

The Mellott Belted Offbearer will move slabs, cants and lumber quickly and safely from the headsaw. Fully assembled and ready to install, this offbearer will fit any mill with 2 1/4" clearance from the highest point of the saw mandrel bearing to the height of the headblock.

The Mellott Belted Offbearer is equipped with a board tipping attachment and our new style splitter blade. The splitter blade is adjustable for use with saws from 48" diameter up to 60" diameter.

The offbearer is available in 18", 22" and 24" wide models, right and left hand.

The offbearer can be driven by downstream rollcases, a drive mounted to the offbearer or by the saw mandrel.

SPECIFICATIONS

Height 7 3/8"
 Length 69"
 Distance required from sawline
 18" Wide belt 24 1/2"
 22" Wide belt 28 1/2"
 24" Wide belt 30 1/2"

Belt Pvc Cos 150
 Belt Widths 18", 22" & 24"
 Driveshaft 1 7/16"
 Drive 2 Hp Electric, Mandrel Or By Rolls
 Pulleys 5 1/2" Diameter
 Conveying Speed 250 FPM

Item Number	Description
40C	2 HP Drive
40A	18" Wide
40B	22" Wide
40	24" Wide

MELLOTT MFG. CO., INC.


13156 Long Lane
 Mercersburg, PA 17236
 Phone: (717) 369-3125 Fax: (717) 369-2800

SOLD BY:



LOG AND LUMBER HANDLING EQUIPMENT

DIMENSIONS

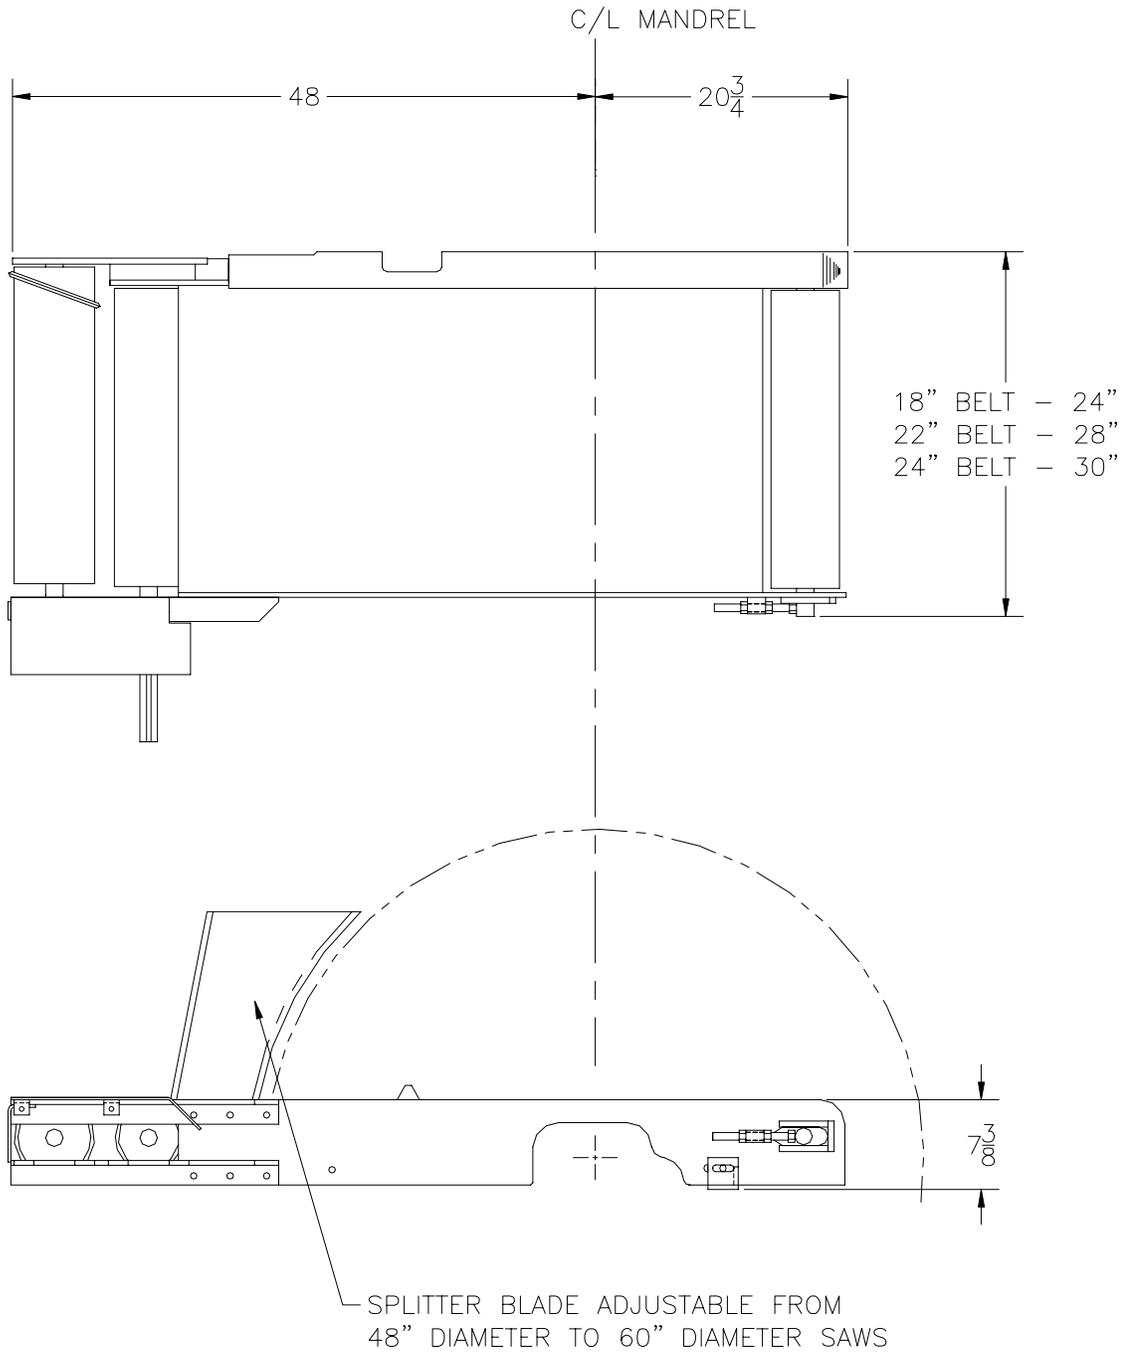

MELLOTT MFG. CO., INC.

13156 Long Lane
Mercersburg, PA 17236

Phone: (717) 369-3125 Fax: (717) 369-2800

SOLD BY: